


ASSEMBLY INSTRUCTIONS

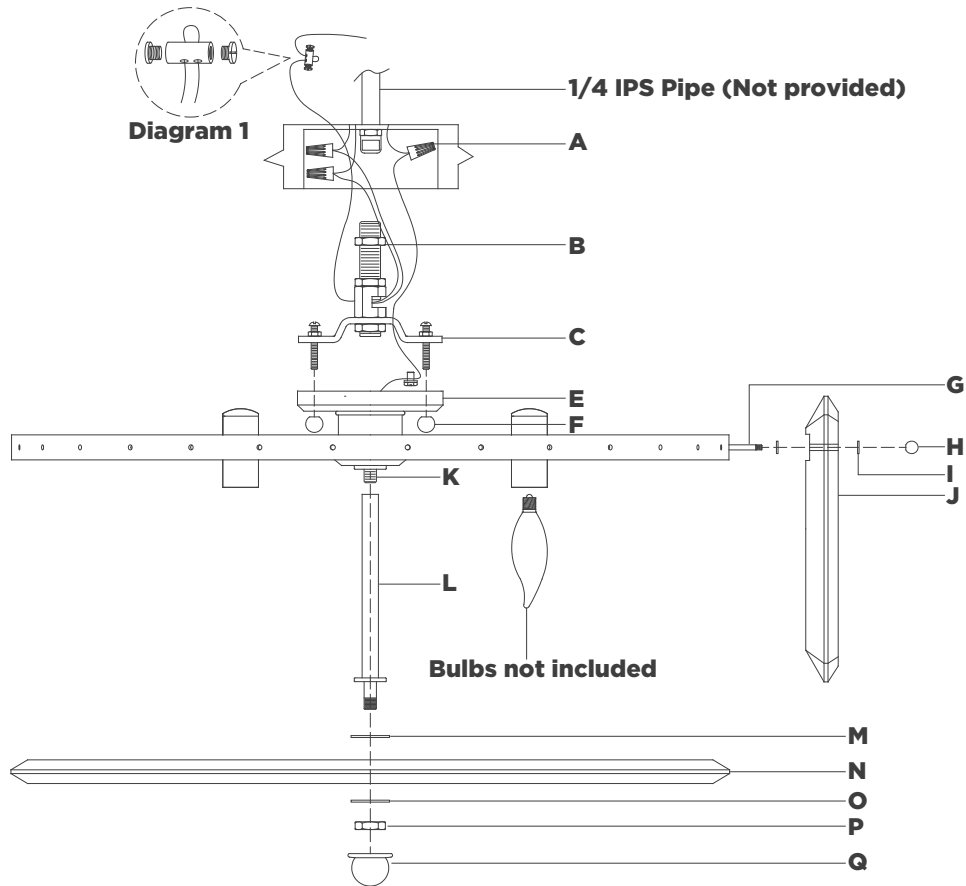

Bonnington Large Flush Mount

Item # ARN4126

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting bracket **(C)** from fixture **(E)** by removing threaded caps **(F)**.
3. Remove hickey **(B)** from mounting bracket **(C)** by removing hex nut.
4. It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building. Then install hickey **(B)** into threaded pipe and tighten with wrench.

NOTE: Item must be supported independent of the junction box due to hanging weight.

5. Install threaded nipple to hickey **(B)**, then install mounting bracket **(C)** to threaded nipple by tightening locknut.
6. Install fixture **(E)** to mounting bracket **(C)** and secure with threaded caps **(F)**.
7. Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure (see diagram 1).

VISUAL COMFORT & Co.



8. Wrap fixture ground wire (bare copper) around the green grounding screw. Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(A)**.
NOTE: It is imperative that the fixture is grounded.
9. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
10. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
11. Make sure all wire connections are tight, then carefully tuck into the junction box.
12. Install fixture **(E)** to mounting plate **(C)** and secure with threaded caps **(F)**.
NOTE: If needed, adjust threaded receivers on mounting plate up or down to expose proper amount of threading to secure caps.
13. Attach rubber washers **(I)** to either side of the crystal/alabaster **(J)** and secure to stems **(G)** with cap nuts **(H)**.
NOTE: Do not overtighten otherwise glass could become damaged.
14. Install light bulb into the socket.
15. Thread rod **(L)** to nipple **(K)**.

VISUAL COMFORT & Co.



CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.