


ASSEMBLY INSTRUCTIONS

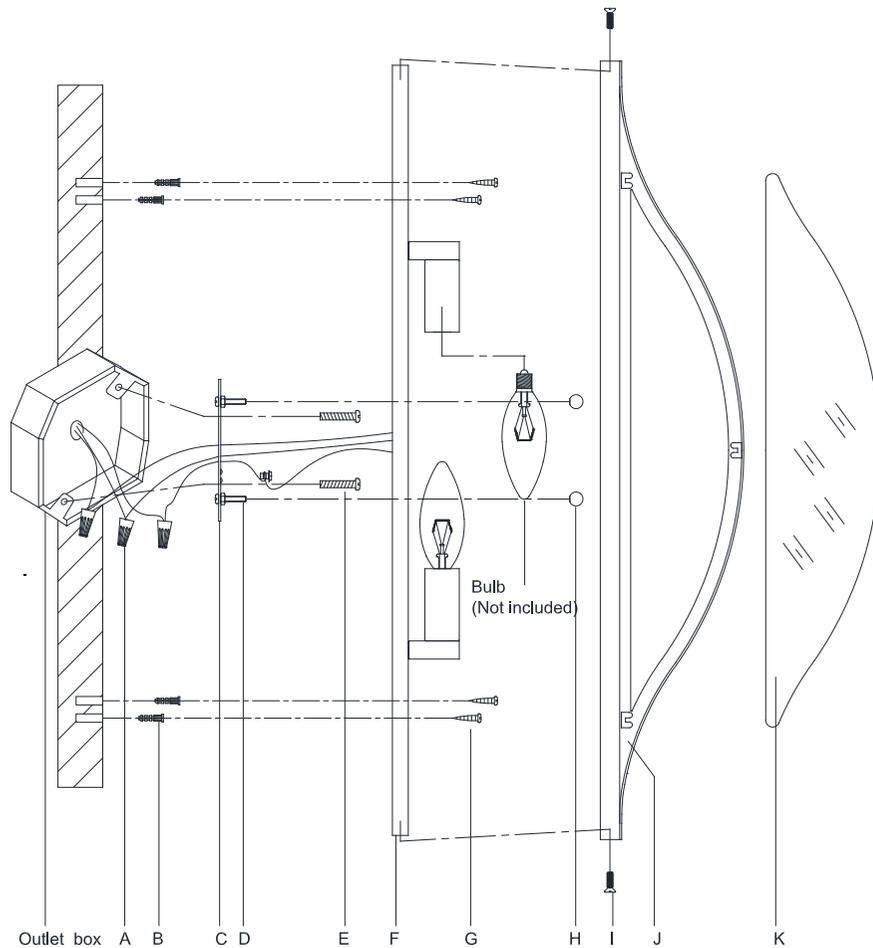

Avant Medium Linear Sconce Item # KW 2702

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- Carefully remove all parts from the box.
 - Remove the shade (J) from fixture body (F) by loosening side screws (I).
 - Remove the mounting plate (C) from fixture body (F) by loosening ball nuts (H).
 - Drill 4 holes on the wall and make sure the hole distance will match to the holes on the fixture body (F).
 - Knock the anchors (B) into the wall holes.
 - Affix mounting plate (C) onto the outlet box and secure with mounting screws (E).
 - Connect the hot wire (BLACK) from the fixture to the hot wire from the outlet box (usually BLACK). Fasten them together with a plastic wire connector (A) provided and wrap the connection with electrical tape.
 - Connect the neutral wire (WHITE) from the fixture to the wire from the outlet box (usually WHITE).
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- Connect ground wire from the fixture (bare copper) to ground wire from the outlet box (usually green or copper in color).
- IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- Attach the fixture body (F) onto the mounting plate (C). Let screws (D) pass through the holes on the fixture body, then secure with ball nuts (H).
 - Secure the screws (G) to the anchors (B).
 - Insert bulbs (not included) into the sockets.
 - Attach the glass diffuser (K) to the shade (J) and secure by bending the metal tabs.
 - Attach the shade (J) to fixture body (F) and secure with side screws (I).
 - Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.