


ASSEMBLY INSTRUCTIONS

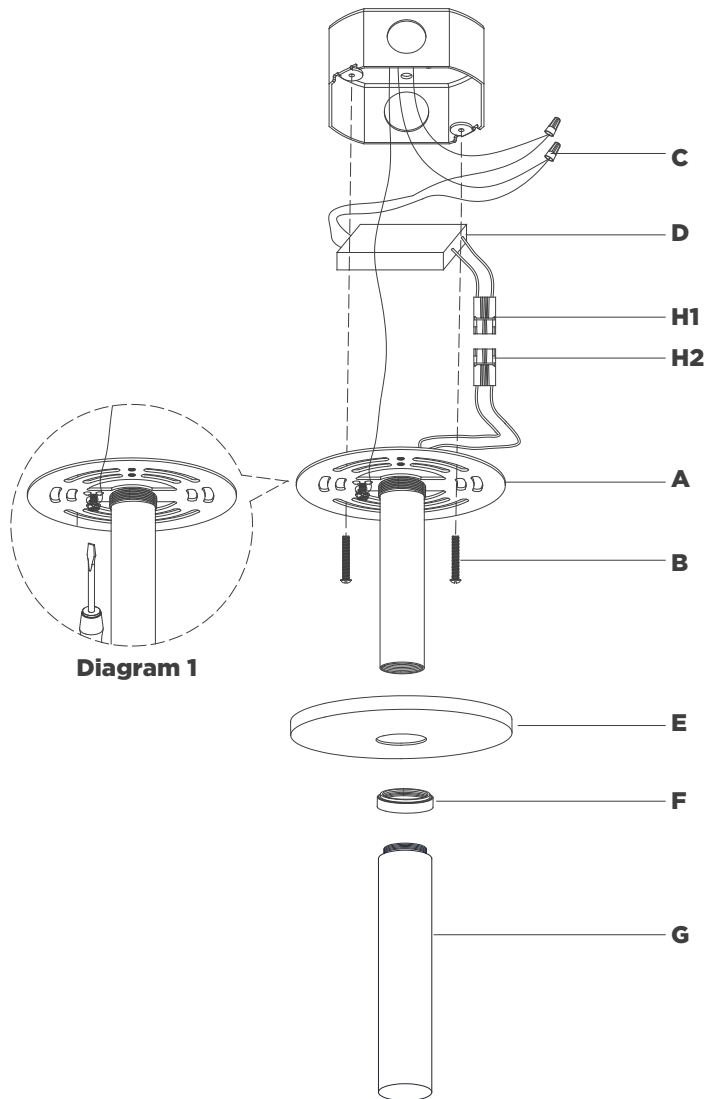

Rousseau Monopoint Flush Mount

Item # KW4282

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy (E) from mounting plate (A) by removing collar ring (F).
3. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
4. Connect driver (D) input neutral wire (white) to the supply neutral wire (usually white) using wire nut (C).
5. Connect driver (D) input hot wire (black) to the supply hot wire (usually black) using wire nut (C).

NOTE: It is imperative that the fixture is grounded.

6. **CAUTION:** Do not reverse the hot and neutral connections.
6. Make sure all wire connections are tight, then carefully tuck into the junction box.
7. Insert driver (D) into the junction box.
8. Connect quick connectors (H1) & (H2) together.
9. Install mounting plate (A) to the junction box and secure with mounting screws (B).
10. Install canopy (E) to mounting plate (A) and secure with collar ring (F).
11. Thread shade (G) to fixture.

NOTE: Do not overtighten otherwise shade could become damaged.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

VISUAL COMFORT & CO.

