


ASSEMBLY INSTRUCTIONS

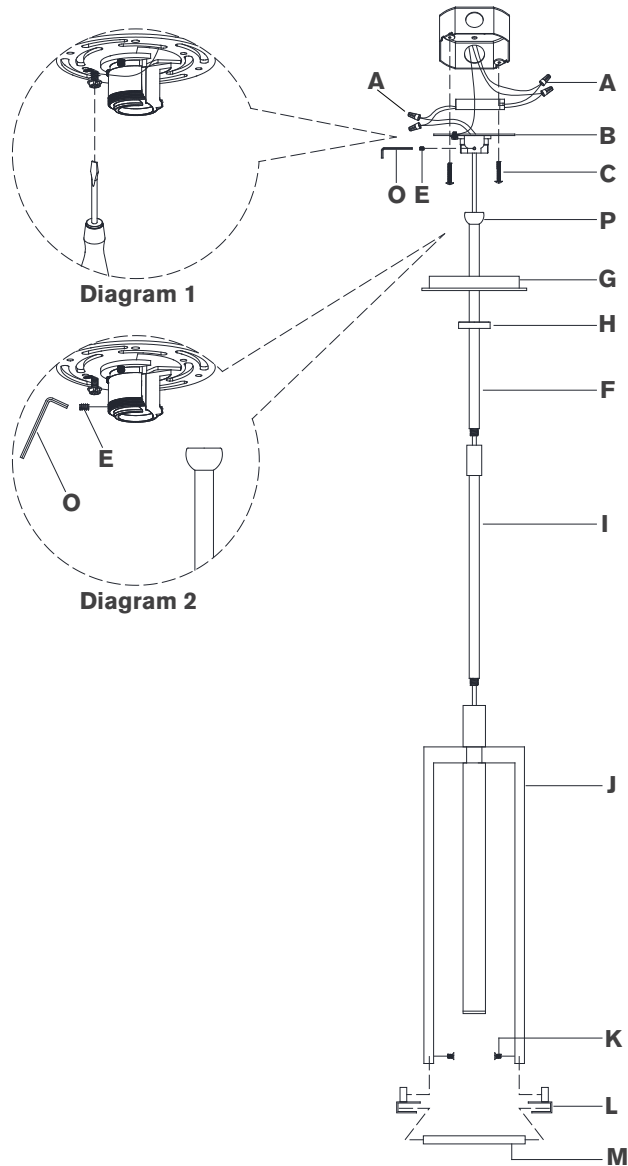

Melange Small Floating Disc Pendant

Item # KW 5610

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver

Wire Strippers

Wire Cutters

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(B)** from canopy **(G)** by loosening collar ring **(H)**.
3. Connect driver input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
4. Connect driver input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.

CAUTION: Do not reverse the hot and neutral connections.

5. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.

NOTE: It is imperative that the fixture is grounded.


6. Insert driver into junction box.
7. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.
8. Feed electrical wires through bottom rod **(I)** and connect to fixture body **(J)**.
9. Continue feeding wires through collar ring **(H)**, canopy **(G)** and top rod **(F)**.
10. Holding fixture upright, slide collar ring **(H)** and canopy **(G)** down and rest on fixture **(J)**. Then connect top rod **(F)** to bottom rod **(I)**.

NOTE: Slide components down slowly to avoid damages.

VISUAL COMFORT



ASSEMBLY INSTRUCTIONS

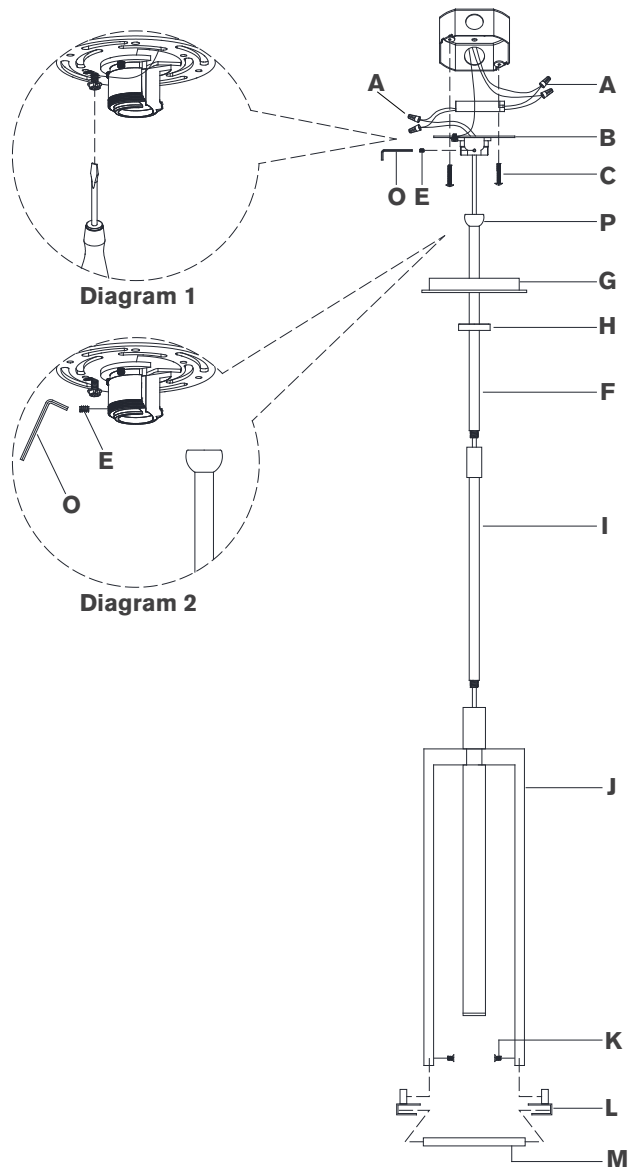

Melange Small Floating Disc Pendant

Item # KW 5610

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

11. Hang fixture swivel ball **(P)** to center of mounting plate **(B)** and secure with set screw **(E)** using provided wrench **(O)**. See diagram 2.
 12. Cut excess wire, being sure to leave enough to reach the junction box. Separate wires, and strip insulation on each 5/8".
 13. Connect fixture neutral wire (black) to driver output wire (black) using wire nut **(A)**.
 14. Connect fixture hot wire (red) to driver output wire (red) using wire nut **(A)**.
- CAUTION:** Do not reverse the hot and neutral connections.
15. Make sure all wire connections are tight, then carefully tuck into the junction box.
 16. Install canopy **(G)** to the junction box and secure with collar ring **(H)**.
 17. Insert disk **(M)** to brackets **(L)**, then install to fixture **(J)** by securing with screws **(K)**.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.