


ASSEMBLY INSTRUCTIONS

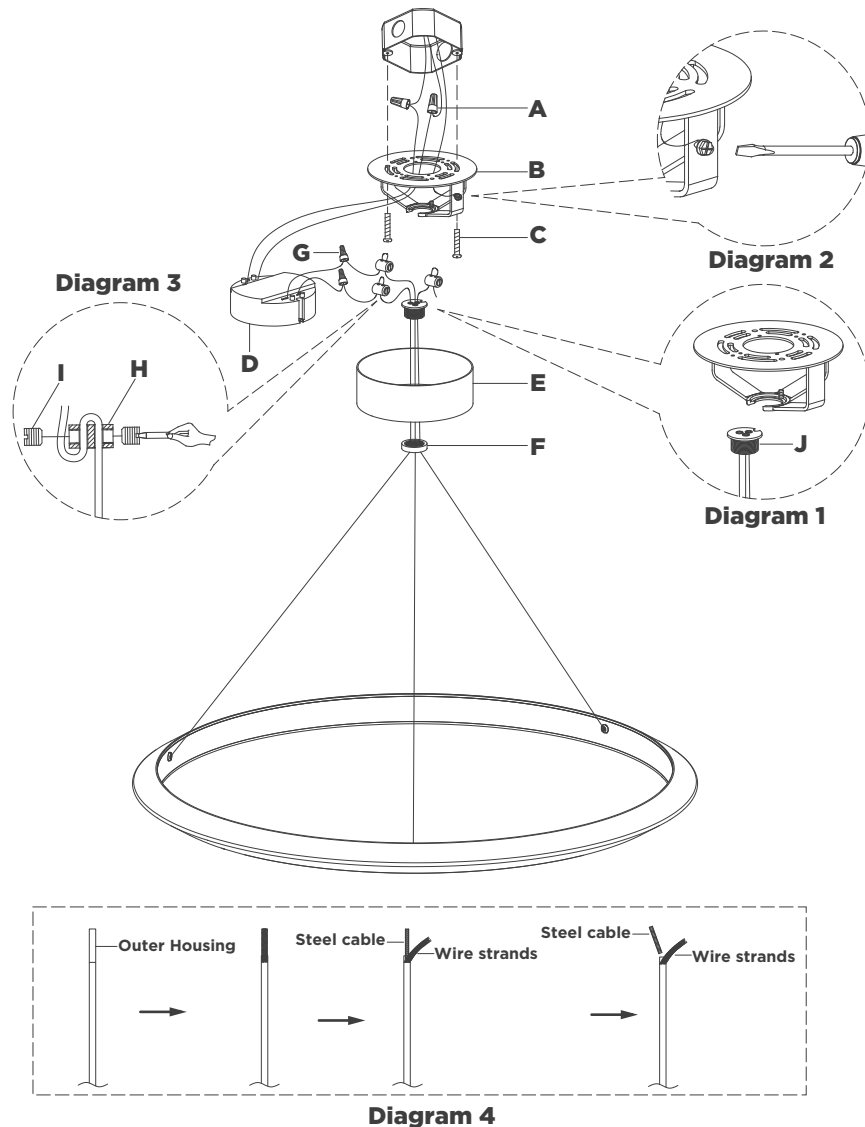

Encircle 28" Ring Chandelier

Item # PB 5150

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Measuring Tape	

1. Carefully remove all parts from the box. Place on a clean, soft surface.
 2. Remove mounting plate (B) from canopy (E) by removing collar ring (F).
 3. Remove collar loop (J) from mounting plate (B) bracket (see diagram 1).
 4. Install mounting plate (B) to the junction box and secure with mounting screws (C).
 5. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 2). Tighten.
- NOTE:** It is imperative that the fixture is grounded.
6. Gently set fixture on a flat, non-abrasive surface to assemble and adjust fixture hanging wires.
 7. Feed hanging cables through collar ring (F) and canopy (E).
 8. Route three hanging cables through holes on collar loop (J). Loosen set screw (I) on cable lock (H) and install to end of hanging cables. Insert other end of cables through the cable lock and adjust to desired length. Once complete re-secure set screw (I). Repeat steps with the remaining wires (see diagram 3).

ASSEMBLY INSTRUCTIONS

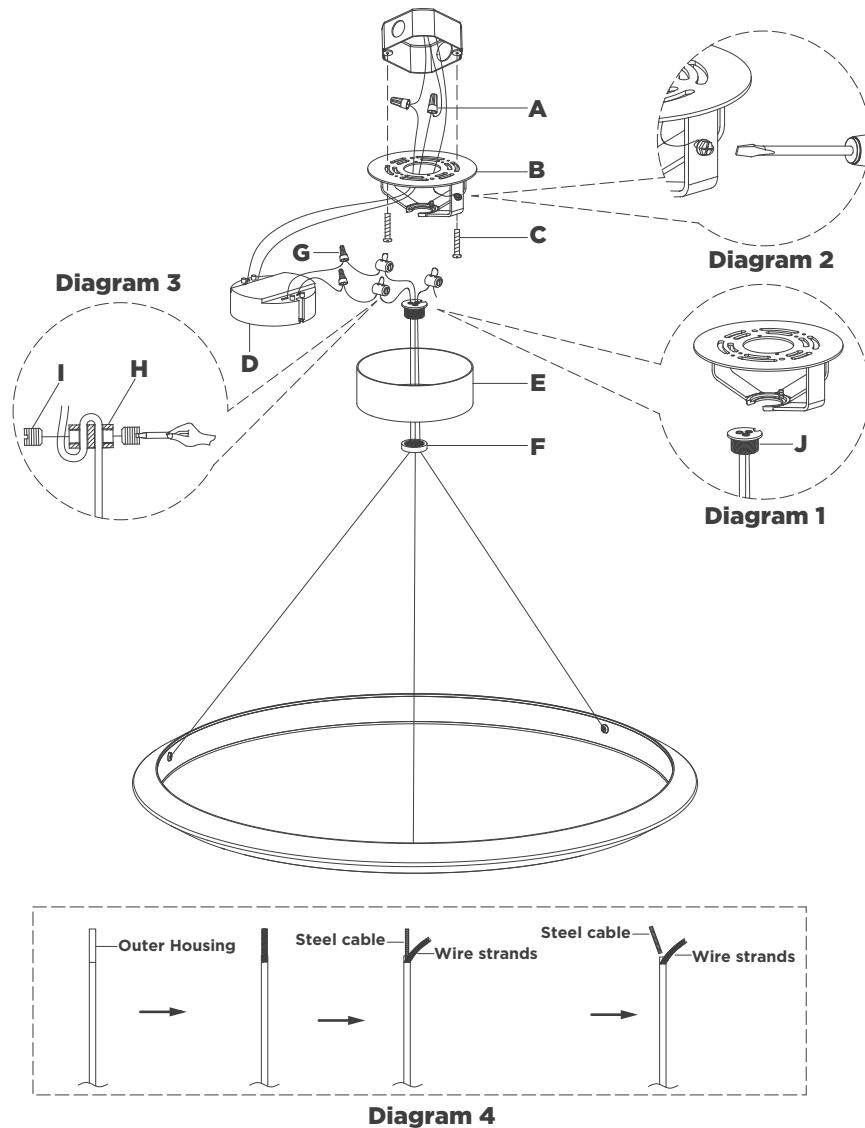

Encircle 28" Ring Chandelier

Item # PB 5150

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

16. Make sure all wire connections are tight, then carefully tuck into the junction box.
17. Insert driver (F) into the middle of mounting plate (B) bracket.
19. Install canopy (E) to mounting plate (B) by secure collar ring (F) to collar loop (J).

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.