

ASSEMBLY INSTRUCTIONS

Daniela Medium One-Tier Chandelier

Item # RL 5005

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.


WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.

IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

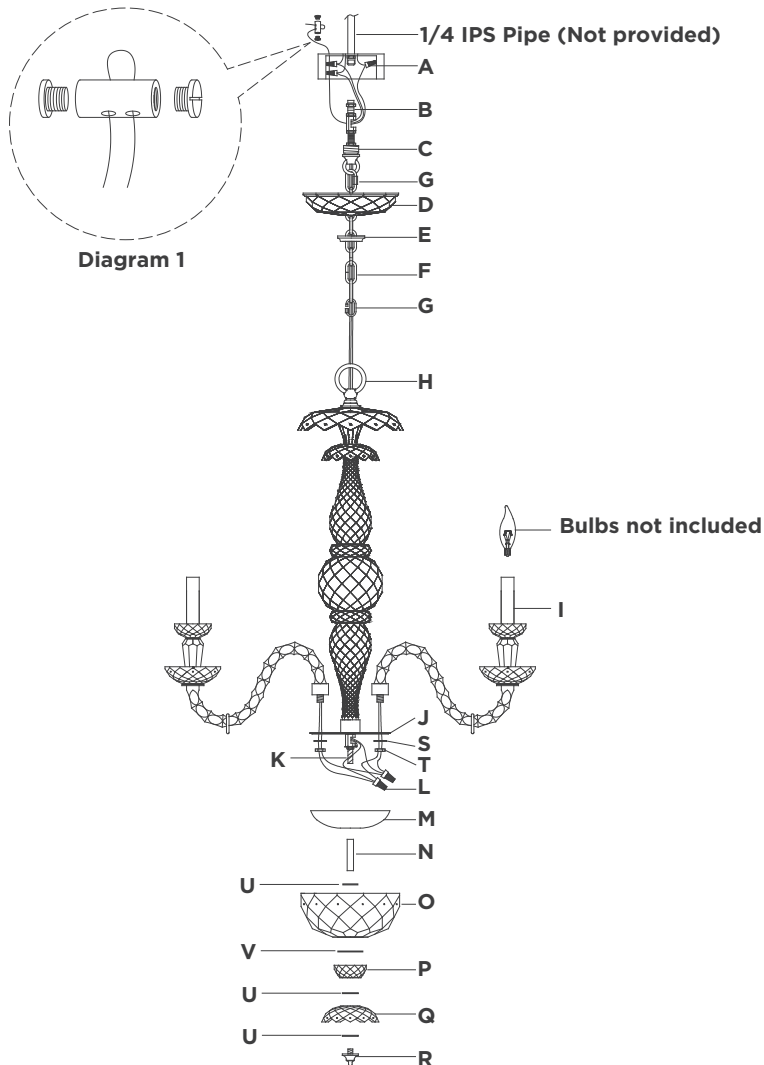

- Carefully remove all parts from the box. Place on a clean, soft surface.
- It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building. Then install hex nut and threaded nipple (B) into receiver and tighten with the wrench.
NOTE: Item must be supported independent of the junction box due to weight.
- Remove collar loop (C) from chain (F) and secure to threaded receiver attached to structural member by tightening locknut.
- Install canopy (D) to collar loop (C) and secure with collar ring (E).
- Determine desired overall length, and amount of chain (F) needed. Shorten chain using chain pliers. (Keep extra chain)
- Attach chain (F) to collar loop (C) and fixture loop (H) using quick links (G). Secure quick links (G).
- Gently set wire arm (I) to the center plate (J) and secure using the spring washer (S) & lock nut (T). Check that the arms are spaced evenly before final tightening.
- Connect hot wire (smooth with markings) from arms to the main hot wire (smooth with markings) from center plate (J) using wire nut (L).
- Connect neutral wire (ribbed) from arms to the main neutral wire (ribbed) from center plate (J) using wire nut (L).
- Wrap all connections individually with electrical tape. Double check that all of your connections are correct.

RALPH LAUREN

ASSEMBLY INSTRUCTIONS

Daniela Medium One-Tier Chandelier

Item # RL 5005

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.


WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.

IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.





NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

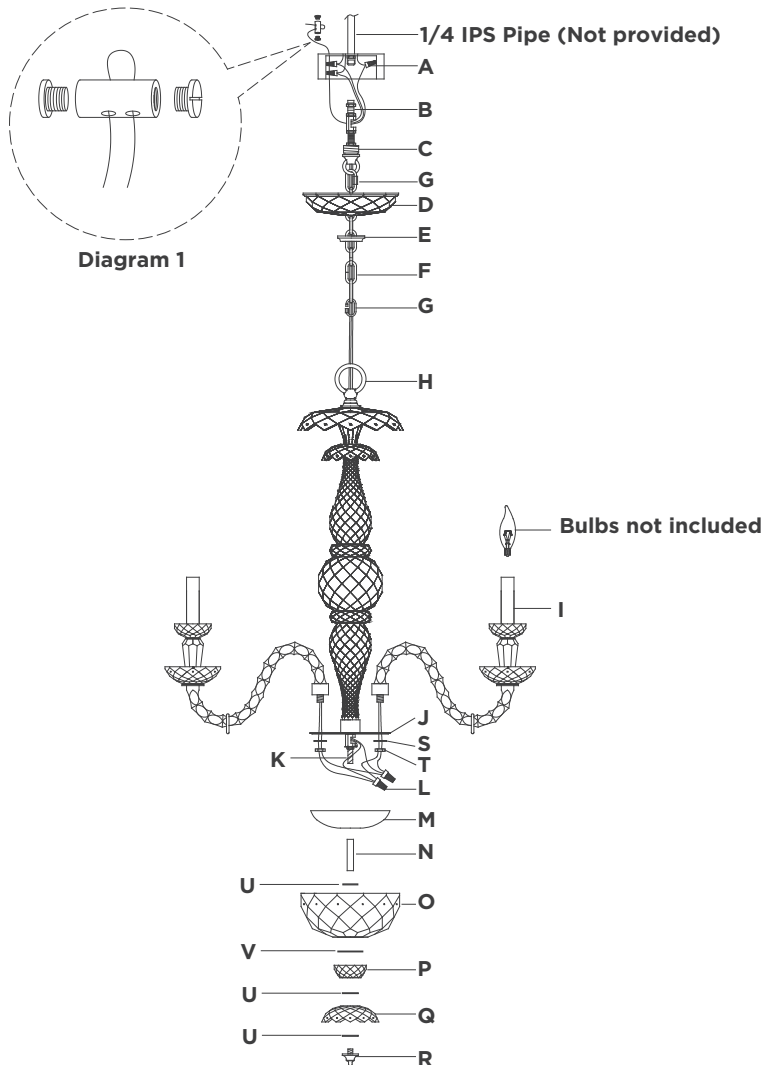

11. Install metal bowl (M) to center plate (J) and secure with metal tube (N).
12. Attach plastic washer (U), crystal bowl (O), crystal (P), crystal disk (Q), plastic washer (V) to metal tube (N) and secure with finial (R).
13. Thread fixture wire and ground wire through chain (F).
NOTE: When you reach the collar loop (C), ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.
14. Separate two sides of molded wire, and strip insulation on each 5/8".
15. Loosen collar ring (E) and let canopy (D) slip down chain (F) carefully.
16. Twist all fixture wires together. Slip through center hole of collar loop (C).
NOTE: Untwist wires and separate to prepare for connection.
17. Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure (See diagram 1).
18. Connect fixture ground wire (bare copper) to the supply ground wire (usually green or bare copper) using wire nut (A).
NOTE: It is imperative that the fixture is grounded.
19. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (A).

RALPH LAUREN

ASSEMBLY INSTRUCTIONS

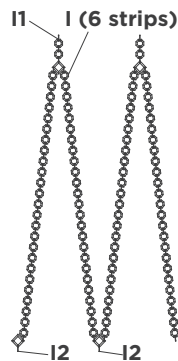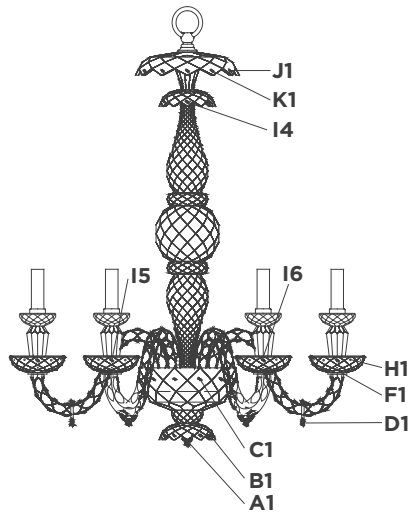

Daniela Medium One-Tier Chandelier

Item # RL 5005

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.

IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

20. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(A)**.

CAUTION: Do not reverse the hot and neutral connections.

21. Make sure all wire connections are tight, then carefully tuck into the junction box.

22. Install canopy **(D)** to collar loop **(C)** and secure with collar ring **(E)**.

23. Install light bulbs into the sockets.

Crystal drops Assembly:

(Reference Diagrams for steps 1-13 below)

1. Hang crystal drop **(A)** on hook **(A1)**.
2. Hang crystal drops **(B)** on hook **(B1)**.
3. Hang crystal drops **(C)** on hook **(C1)**.
4. Hang crystal drops **(D)** on hook **(D1)**.
5. Hang crystal drops **(E)** on hook **(E1)**.
6. Hang crystal drops **(F)** on hook **(F1)**.
7. Hang crystal drops **(G)** on hook **(G1)**.
8. Hang crystal drops **(H)** on hook **(H1)**.
9. Hang top hook **(I1)** of crystal drops **(I)** on hook **(I4)**.
10. Hang bottom hook **(I2)** of crystal drops **(I)** on hook **(I5 & I6)**.
11. Hang crystal drops **(J)** on hook **(J1)**.
12. Hang crystal drops **(K)** on hook **(K1)**.
13. Hang crystal drops **(L)** on hook **(L1)**.

* * * Clean with a dry, soft cloth only. Do not use harsh abrasives or chemical agents.

RALPH LAUREN